
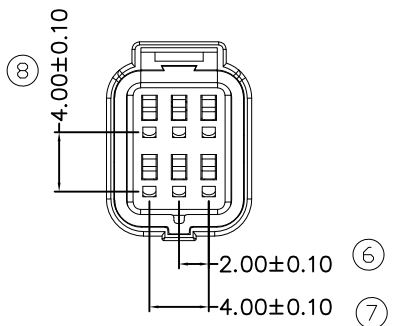
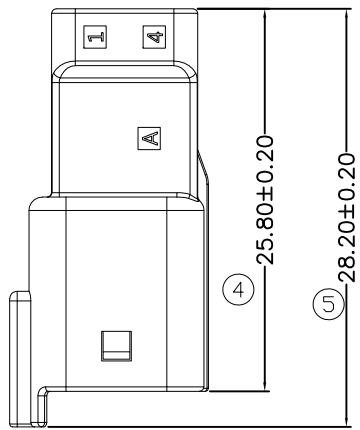
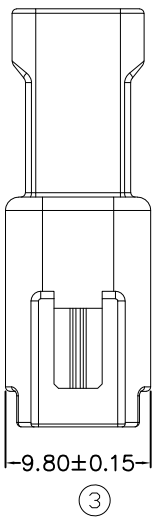
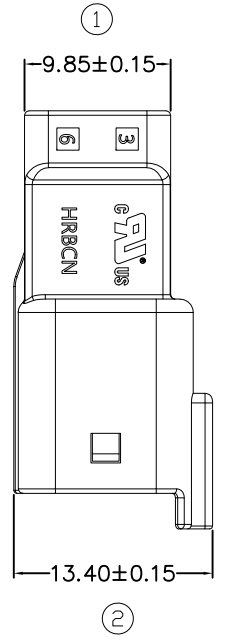


1	2	3	4	5	6	7	8	
页数 (Page No.)	1/1	Used By:	HRBCN	Version 版次	Engineer Change No ECN编码	Change Description 变更描述	Date 日期	Approved by 审核
				A0	---	初版发行	2020. 5. 22	CML
				A1	ECN-20210817001	增加 CUL Logo	2021. 8. 19	CML



SPECIFICATIONS:


- Current Rating: 3A AC, DC Max.
- Voltage Rating: 100V AC, DC
- Operating Temperature: -40°C ~ +130°C
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage: 1000V AC/minute
- Material: Housing: PBT UL94V-0, natural (white)
Seal ring: Silicon rubber
Seal plug: Silicon rubber
Seal ring holder: PBT UL94V-0, yellow

M20033E-2X3-C

Color:
W: White
B: Black
G: Gray






料号 (Part No.)	M20033E-2X3-C		
产品名称 (Product Name)	2.0防水E-unlock连接器		
比例 (Scale)	1:1	版本 (Version)	A1

UNIT:mm	
Tolerance:	Angular Dim.
.XXX ±0.05	.XX° ±1°
.XX ±0.10	.X° ±2°
.X ±0.20	X.° ±3°



核准 Approved:		日期 Date:	
审核 Checked:		日期 Date:	
设计 Designed:	CML	日期 Date:	2021. 8. 19

1	2	3	4	5	6	7	8	
页数(Page No.)	1/1	Used By:	HRBCN	Version 版次	Engineer Change No ECN编码	Change Description 变更描述	Date 日期	Approved by 签核
				A0	---	初版发行	2020. 5. 22	CML
				A1	ECN-20210817001	增加 CUL Logo	2021. 8. 19	CML

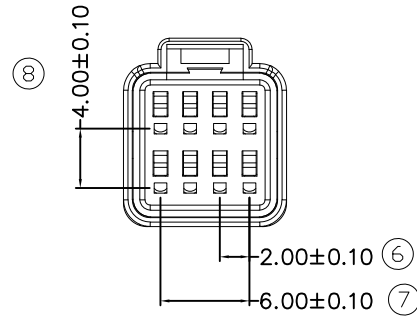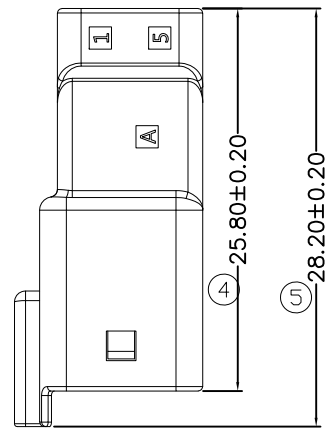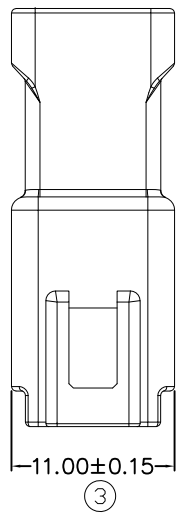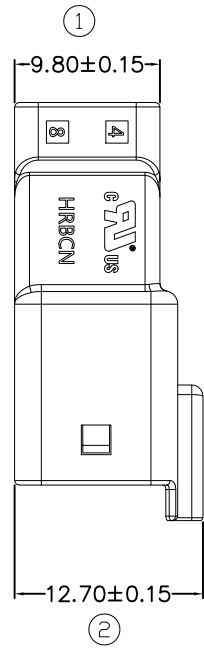

SPECIFICATIONS:


- Current Rating: 3A AC, DC Max.
- Voltage Rating: 100V AC, DC
- Operating Temperature: -40 °C ~ +130 °C
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage: 1000V AC/minute
- Material: Housing: PBT UL94V-0, natural (white)
Seal ring: Silicon rubber
Seal plug: Silicon rubber
Seal ring holder : PBT UL94V-0, yellow

M20033E-2X4-C

Color:
W: White
B: Black
G: Gray

料号 (Part No.)	M20033E-2X4-C		
产品名称 (Product Name)	2.0防水E-unlock连接器		
比例(Scale)	1:1	版本(Version)	A1

UNIT:mm	
Tolerance:	Angular Dim.
.XXX ±0.05	.XX° ±1°
.XX ±0.10	.X° ±2°
.X ±0.20	X.° ±3°



核准 Approved:		日期 Date:	
审核 Checked:		日期 Date:	
设计 Designed:	CML	日期 Date:	2021. 8. 19