






Version 版次	Engineer Change No ECN编码	Change Description 变更描述	Date 日期	Approved by 审核
A	---	Initial release	09/20-'22	Yi Xiao Xu




3D View
1x3 Pin

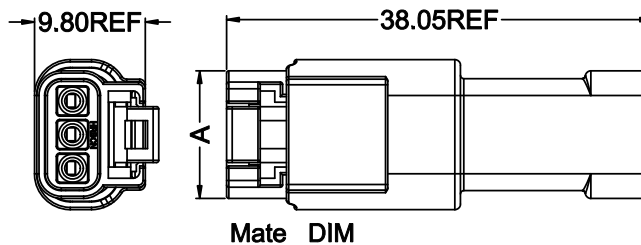


Mate DIM




1x2 Pin






1x4 Pin



1x5 Pin



1x6 Pin





NOTES

*Material

Housing: PBT UL94V-0;
 Seal plug: Silicon rubber;
 Seal plug holder : PBT UL94V-0;
 Used With: T30032WPPS-x
 Mated With: M30033WP-1xN-W

*Electrical Specification

- Current Rating: 10A AC,DC Max. (AWG18)
- Voltage Rating: 250V AC,DC
- Operating Temperature: -40 °C~+105 °C
- Insulation Resistance: 1000MΩ Min.
- Withstanding Voltage: 1500V AC/minute
- Waterproof Grade: IP67

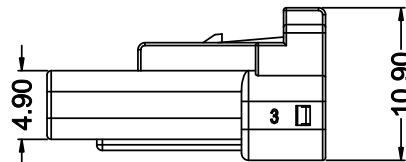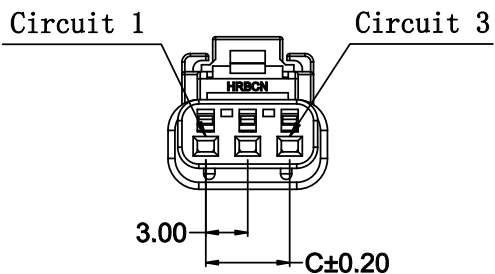


Pin No.	料号	A	B	C
1x2	M30032WP-1x2-W	8.40	7.00	3.00
1x3	M30032WP-1x3-W	11.40	10.00	6.00
1x4	M30032WP-1x4-W	14.40	13.00	9.00
1x5	M30032WP-1x5-W	17.40	16.00	12.00
1x6	M30032WP-1x6-W	20.40	19.00	15.00

料号 (Part No.)	M30032WP-1xN-W		
产品名称 (Product Name)	Water Proof 3.0 Pitch Male (1xN) Pin		
比例(Scale)	1:1	版本(Version)	A

UNIT:mm	
Tolerance:	Angular Dim.
.XXX ±0.10	.XX° ±1°
.XX ±0.20	.X° ±2°
.X ±0.30	X.° ±3°

东莞市鸿儒连接器有限公司
 Hong Ru Connectors(DG) Co.,Ltd.



核准Approved:	日期Date:	09/20-'22
审核Checked:	日期Date:	09/20-'22
设计Designed:	日期Date:	09/20-'22