
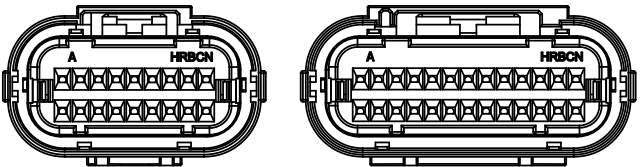
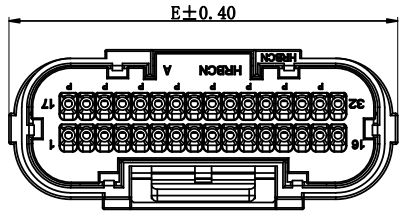
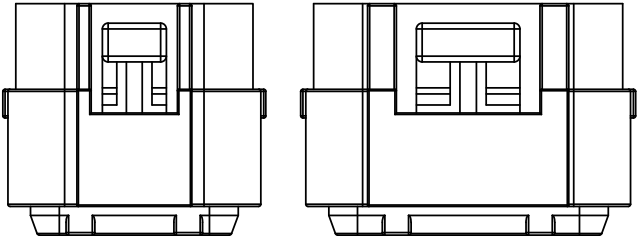
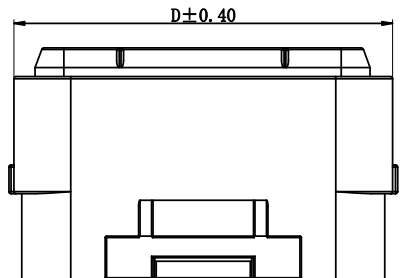
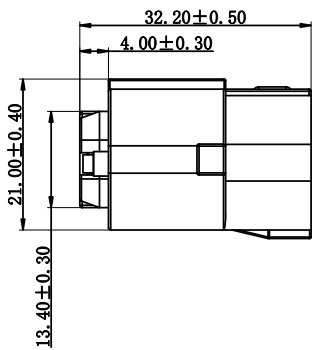
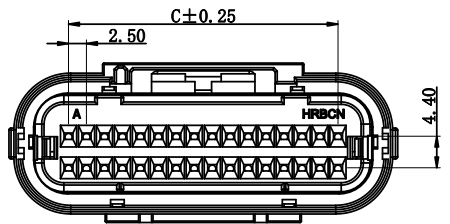
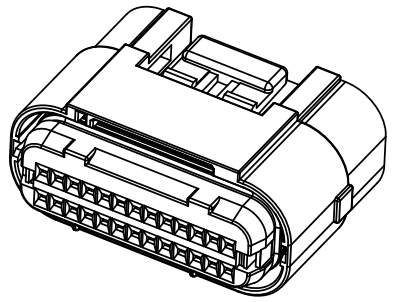


A	---	初版发行	02/17-'22	Yi Xiaoxu

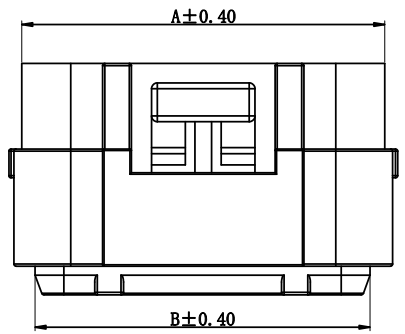

2X9PIN

2X13PIN

NOTES

***Material**

Housing:PBT UL94V-0 Black;
 Seal ring:Silicon rubber;
 Seal ring holder :PBT UL94V-0 Yellow;
 Seal plug:Silicon rubber;
 Seal plug holder :PBT UL94V-0 Gray/Black
 Contact:Copper Alloy;
 Contact Plating:Tin Plating Over Ni On Contact Area
 Used With:T2532PS-x-2
 Mated With:M2531&M2531R-2xN-C

***Electrical Specification**

Dielectric Withstanding Voltage: 1000 VDC/Minute.
 Current Rating: 3 Ampere Max.
 Insulation Resistance: 100 MΩ min.
 Operating Temperature: - 40°C To +125°C.

Part No. :M2532-2xN-B

Color:B:Black
 Pin No.:2x9PIN~2X17PIN


Circuit No.	A	B	C	D	E
2x9	33.0	28.9	20.0	35.2	36.6
2x12	40.5	36.4	27.5	42.7	44.1
2x13	43.0	38.9	30.0	45.2	46.6
2x16	50.5	46.4	37.5	52.7	54.1
2x17	53.0	48.9	40.0	55.2	56.6

料号 (Part No.)	M2532-2xN-B		
产品名称 (Product Name)	2.5PH 线端 2xN CONN		
比例(Scale)	1:1	版本(Version)	A

UNIT:mm	
Tolerance:	Angular Dim.
.XXX ±0.10	.XX° ±1°
.XX ±0.20	.X° ±2°
.X ±0.30	X.° ±3°



东莞市鸿儒连接器有限公司
 Hong Ru Connectors(DG) Co.,Ltd.



核准Approved:		日期Date:	
审核Checked:		日期Date:	
设计Designed:	Yi Xiaoxu	日期Date:	02/17-'22